

HYBRID INVERTER

ULTRA HYBRID PRO 8K 3F

INDEKS:3SSHZ9083F

EAN:5904100452316



Features

- Combines the function of an on-grid and off-grid
- Easy parameters configuration via LCD touchscreen
- Built-in Smart Meter and current transformers included with the inverter
- Cooperation with the Ultra 5 energy storage
- Short-circuit, overload and temperature protection
- Computer software via USB or external WIFI remote control module included (view and control of parameters)
- Compatible with the system BMS
- 3-phase power supply with continuous power up to 8kW without mains power
- Possibility to connect a 3-phase generator with autostart option (built-in relay)
- 5 operating modes: Store Mode, Load First Mode, Battery First Mode, Grid First Mode and Advanced Mode (manual setting of the operating mode for different hours of the day)
- Possibility of parallel operation of up to three inverters
- Possibility of cooperation with other inverters connected to the building's electrical installation (charging the battery with surplus energy from another inverter)

How does hybrid inverter combines the function of on-grid/off-grid?


On-grid:

In on-grid when the photovoltaic installation is connected to the user's electrical installation the hybrid inverter works like a typical on-grid inverter. It converts direct current (DC) generated by solar panels into alternating current (AC). Thanks to that we can power electrical devices in the house. Surplus energy is sent via the inverter to the power grid.


Off-grid:

In off-grid the hybrid inverter operates independently of the user's electrical installation. The energy obtained from solar panels is stored in batteries and then transferred to the connected devices we want to power.

Solar system connection

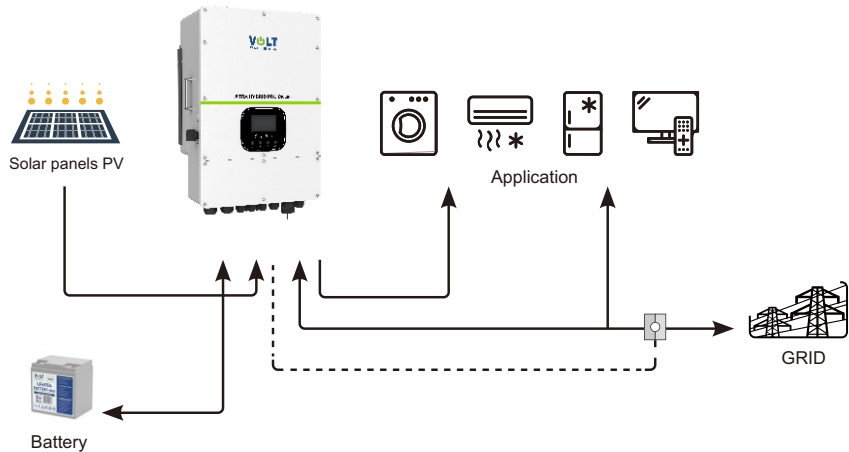

Back panel description

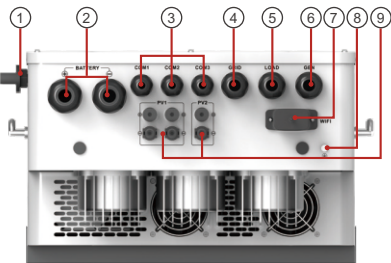

1. DC switch
2. Battery input connectors
3. BTS terminals, BMS terminals, load monitor terminals, dry contact terminals, CAN communication terminals, USB terminal and cover
4. Circuit breaker of Grid
5. Load
6. Generator input
7. WiFi Interface
8. Ground
9. PV input with two MPPT

Specification

Model	ULTRA HYBRID 8000	
PV Input (DC)	Nominal DC operating voltage	550V
	Maximum DC voltage	800V
	MPPT voltage range	200-650V
	Maximum input current	13A/13A
	Number of MPPT tracker	2
	Strings per MPPT tracker	2
Inverter Output (AC)	Output voltage range	220/230/240V;180-280V
	Maximum output current	13,4/12,8A
	Frequency (Hz)	50/60Hz; 45-55/55-65Hz
	Grid type	3 phase
Battery	Battery voltage	48V
	Battery voltage range	40-60V
	Maximum charging currenrnt	190A
	Output waveform	Pure sine wave
Protections: short circuit, overload, temperature	Yes	
Maximum efficiency	97,10%	
Operating Temperature	(-)25~60°C >45°C	
Interfejs	RS485/CAN	
Cooling	Fans	
Dimensions	446x692x260mm	
Weight	38kg	
Gross dimensions	816x567x404mm	
Gross Weight	46kg	



VOLT POLSKA SP. Z O.O.

UL. ŚWIEMIROWSKA 3

81-877 SOPOT

WWW.VOLTPOLSKA.PL